

Diamond stone cutter for wet cuts, mitre cuts up to 45 °, with GFCI circuit breaker

CS 60 WET

Order number 374.016



Technical attributes	
Power input	1400
Power output	840
No load speed	6200
Diamond cutting disc Ø / arbor (inside Ø)	170 / 22,2 mm
Cutting depth / with guide rail	60 / 54 mm
Mitre cuttings	0-45°
Depth of cut - mitre cut	5-44
Depth of cut - mitre cut with guide rail	0-38
Cable length	4,0
Weight	4,5

Diamond stone cutter for wet cuts, mitre cuts up to 45 °, with GFCI circuit breaker

- + High-performance motor: extra powerful for stone cutting and joint milling
- + Continuous cut depth setting from 0-60 mm, with rail guide up to 54 mm. In the mitre cut from 0-44 mm, with guide rail up to 38 mm
- + Continuous angle adjustment for mitre cuts from 0-45°
- + Cut marking at the base plate from 0°/30°/45° for rapid orientation
- + High-quality magnesium die-castings for protective cover and base plates
- + Motor protection made of rubber prevents the direct intake of spray water
- + Water supply: for an effective cooling of the diamond blade
- + Quick-fit brass coupling: for 1/2" water hose
- + GFCI operator protector circuit breaker: integrated in cord
- + Ideal for: Inserting water grooves in window sills or steps, work tops, facade slabs, terrazzo slabs in garden design & landscaping, joint renovation in the floor
- + Spindle lock

Standard equipment	
1 diamond cutting disc with segmented cutting edge	347.515
1 wrench for saw blade change	359.343
1 parallel guide fence	350.613
1 carrying case L-BOXX® 238	414.093
1 case insert	436.771

Accessories

Diamond cutting disc

Order number 347.515



Technical attributes	
Dimensions in mm	170 Ø x 22,2
QTY/PKG	1

With segmented cutting edge, vibration-dampened. For granite, marble, sandstone, concrete.

Diamond cutting disc

Order number 367.214



Technical attributes	
Dimensions in mm	170 Ø x 22,2
QTY/PKG	1

With closed cutting edge for a clean wet-cut, suitable for tiles, marble plates and ceramics.

Diamond cutting disc

Order number 386.189



Technical attributes	
QTY/PKG	1
Dimensions in mm	170 Ø x 22,2

With turbo segments for a clean wet cut; suitable for tiles and fine stoneware of any thickness up to hardness 5, marble, slate, granite

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX
Das Original

and natural stone.

Guide rail GRS

Order number 353.280



Technical attributes	
Length in mm	800
QTY/PKG	1

Precise aluminium profile with anodized sliding coating and guide rib. Plugged rubber lip as contact edge at the marking, anti slip protection on the bottom. Connector 353.272 can be used to extend the guide rails as required.

Guide rail GRS

Order number 359.351



Technical attributes	
Length in mm	1600
QTY/PKG	1

Precise aluminium profile with anodized sliding coating and guide rib. Plugged rubber lip as contact edge at the marking, anti slip protection on the bottom. Connector 353.272 can be used to extend the guide rails as required.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX
Das Original

Accessories

Connector for guide rail GRS

Order number 353.272




Precise metal connector for connecting two guide rails GRS. When not in use, the connector can be parked in the guide rail with the included tool wrench SW 5 - screw driver.

Technical attributes

QTY/PKG	1
---------	---

Anti slip insert L-BOXX®

Order number 419.397

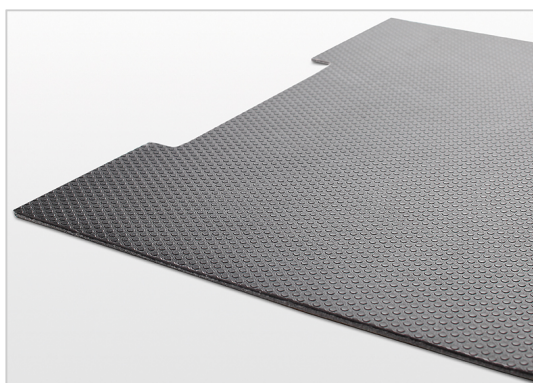

Soft insert mat made of rubber suitable for the L-BOXX® type 374. Protects the Boxx and the material on the floor from damage during transportation.

Technical attributes

Size (W x L x H)	378 x 296 x 3
QTY/PKG	1

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX
Das Original

Accessories

Trolley L-BOXX®

Order number 419.400




Technical attributes

Dimensions in mm	646 x 492 x 182
Weight	3,8
QTY/PKG	1

Trolley for the L-BOXX®es made of plastic with 4 castors, two of which can be locked. Can be loaded up to 100 kg.

Case insert

Order number 436.771

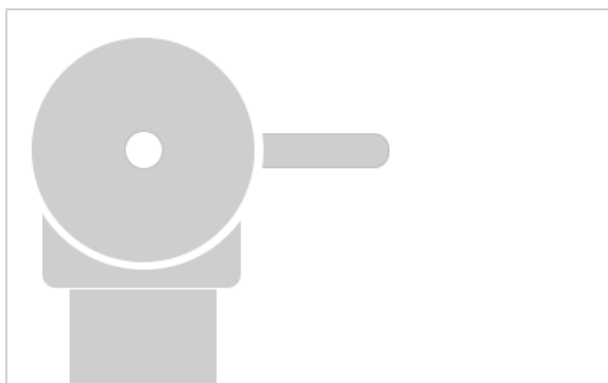

Technical attributes

QTY/PKG	1
---------	---

Matching insert for CS 60 WET for carry case L-BOXX® 238.